




### 100LF AFR AIR PRESSURE STABILISER : DATA SHEET

Fire rated for walls.

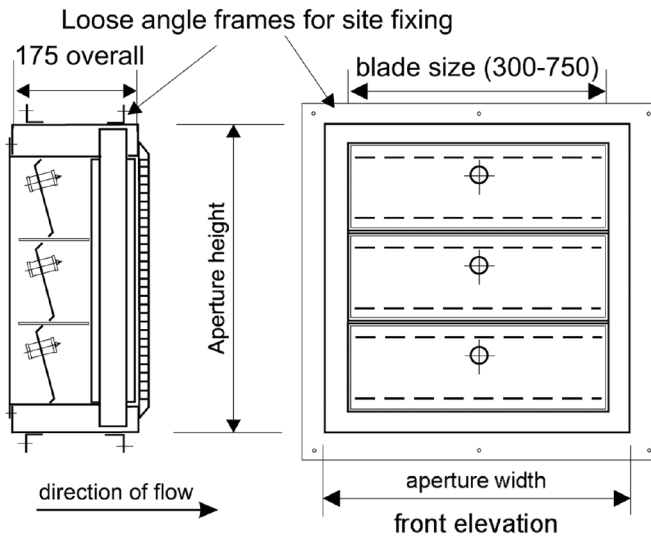

**SteriTouch®**  
ANTIBACTERIAL PROTECTION

A SteriTouch coating is applied as standard to all of the products in our LF Range of Air Pressure Stabilisers

#### Features

- Slimline unit at just 175mm deep overall
- Fire resistance of up to 120 minutes integrity to EN1366-2:1999 and ISO10294-2:1999
- High finish white polyester coated carbon steel case
- Surface mounted egg-crate grille, removeable for fire damper re-setting
- Loose angle frames, included for wall mounting
- Fire damper operated by a fusible link

**Standard Blade Lengths** - 300, 330, 380, 430, 480, 520, 550, 610, 650, 680, 720, or 750mm

#### Dimensions - mm

These are dependant on your specification calculations and size of available wall space.

No. of Blades	Overall Height	Overall Width
1	307	Blade Length + 189
2	448	Blade Length + 189
3	572	Blade Length + 189
4	721	Blade Length + 189
5	845	Blade Length + 189
6	994	Blade Length + 189

#### Unit Selection

To make your 100LF AFR unit selection hassle free we will do the calculations for you. Contact us with your specifications and leave the rest to us.

**AERCON** - 38, Queen Street, Premier Business Park, Walsall, West Midlands. WS2 9QE

**telephone** +44 (0) 1922 720 561

**email** enquiries@aercon.com

**web** www.aercon.com