




**PRESSURE CONTROL VALVES
AIR PRESSURE STABILISERS**



100LFM AIR PRESSURE STABILISER : DATA SHEET

For wall mounting between thicknesses of 100mm - 175mm.

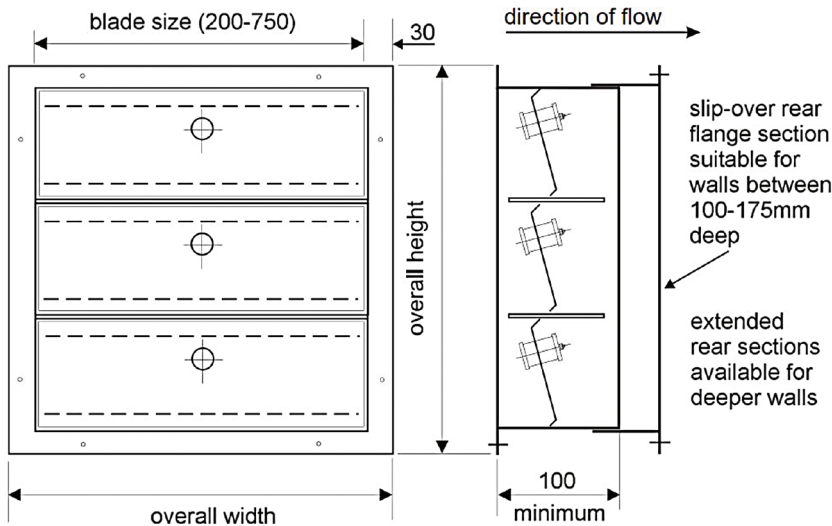

A SteriTouch coating is applied as standard to all of the products in our LFM Range of Air Pressure Stabilisers

Features

- Control of pressures from 5 - 50 Pa
- Accuracy of ± 1 Pa over the operating range
- Standard slip over rear flanges to suit walls 100 - 175mm
- Extended slip over rear flanges to suit walls over 175mm
- Extended slip over rear section available on request
- Between 1 - 8 blades available
- Self actuating - no external energy source required
- Accuracy preset to pressure but site adjustable
- SteriTouch antimicrobial coating as standard to reduce MRSA and E-Coli 157 bacteria
- Low maintenance

Standard Blade Lengths - 200, 250, 300, 330, 380, 430, 480, 520, 550, 580, 610, 650, 680, 720 or 750mm.

Dimensions - mm

These are dependant on your specification calculations and size of available wall space.

No. of Blades	Overall Height	Overall Width
1	178	Blade Length + 60
2	302	Blade Length + 60
3	426	Blade Length + 60
4	550	Blade Length + 60
5	674	Blade Length + 60
6	798	Blade Length + 60

Unit Selection

To make your 100LFM unit selection hassle free we will do the calculations for you. Contact us with your specifications and leave the rest to us.

AERCON - 38, Queen Street, Premier Business Park, Walsall, West Midlands. WS2 9QE

telephone +44 (0) 1922 720 561

email enquiries@aercon.com

web www.aercon.com