




X RANGE - AIR PRESSURE CONTROL VALVES : DATA SHEET

Valves for specialist, heavy duty and external applications.

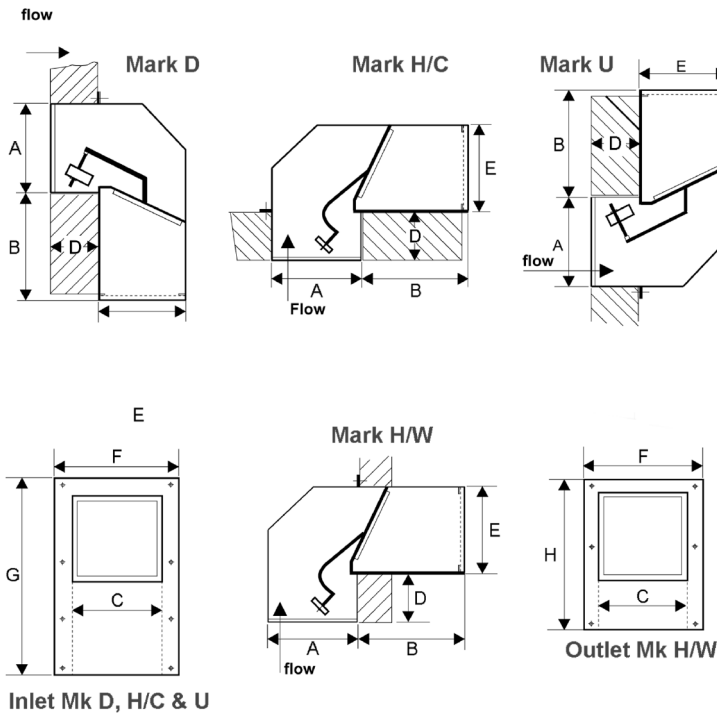

Unit Configurations

- Mark D - with integral weather hood for use on external walls with a downward discharge
- Mark H/C - for ceiling / roof mounting applications
- Mark H/W - for horizontal mounting through walls
- Mark S/T - straight through valves for duct mounted operations
- Mark U - for vertical upward discharge

Features

- Operating pressure ranges from 5 - 500 Pa
- Modular range of units in 5 sizes and 5 configurations
- Heavy duty valve bodies in carbon steel finished in Polyester powder coating
- Option of self finish or polished stainless steel in grades 304 or 316
- Shock tested up to 29g for hardened line buildings
- Seals against back-flow

Dimensions

Dimensions are available upon request.

Unit Selection

To make your X unit selection hassle free we will do the calculations for you. Contact us with your specifications and leave the rest to us.